



博拓科技
BoDo Technology



Suntek Material



intertek

SGS





企业简介

Company Profile

Suntek Material is one of the leading manufacturers of PVC products for construction and home decoration, offering a comprehensive range including vinyl flooring, decorative panels, moldings, railings, fencing, wall panels, and PVC sheets. We operate one factory in Malaysia and two factories in China under the name Bodo Plastics, with a combined factory footprint exceeding 1.2 million square feet.



SPC地板

SPC FLOORING

SPC是Stone Plastic Composites的缩写，是挤出机结合T型模具挤出SPC基材，用三辊四辊压延机分别把PVC耐磨层、PVC彩膜和SPC基材，一次性加热贴合。压纹而成，是不使用胶水的产品。SPC地板即是碳酸钙+树脂生产而成的地板。

SPC is the abbreviation of Stone Plastic Composites. It is an extruder machine worked with T type mould to extrude the SPC product, With the three-roll and four-roll calender. we can combine the separately PVC wear layer, PVC color film and SPC substrate together with one heat process at one time. No any glue during the production. SPC floor is a floor made of calcium carbonate + resin.



Extreme strict
quality control



Considerable
sales service



intertek

SGS



WOOD COLLECTION















BT-SPC-5201



BT-SPC-5204



BT-SPC-6241



BT-SPC-6245



BT-SPC-5232



BT-SPC-5125




BT-SPC-5352




BT-SPC-6233




BT-SPC-6247

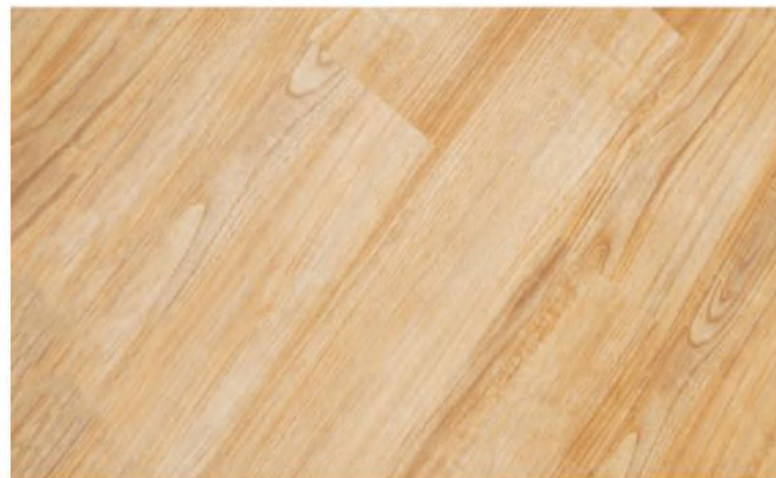

BT-SPC-6213

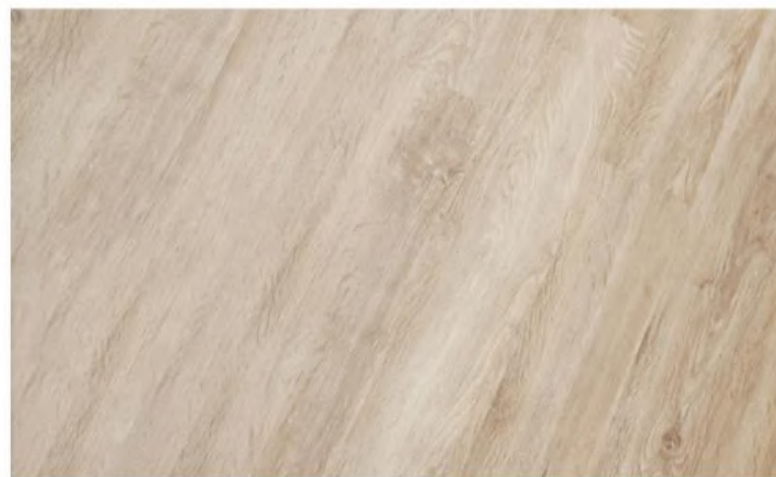


BT-SPC-6240

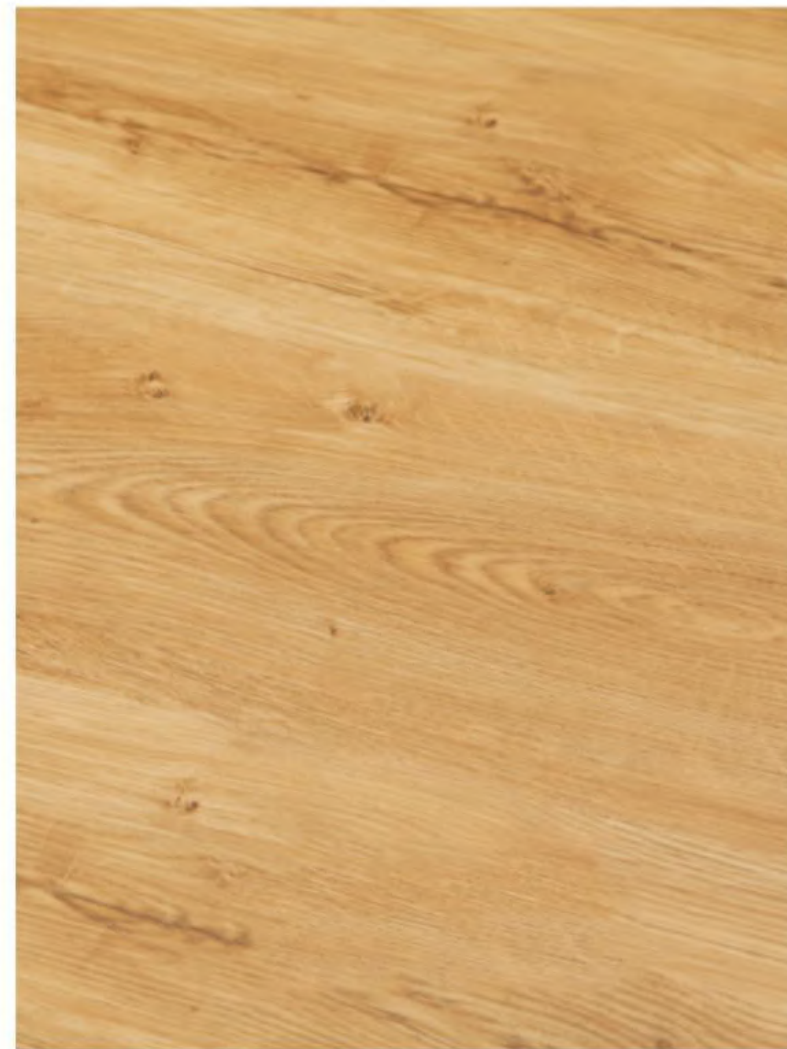

BT-SPC-6219



BT-SPC-5119

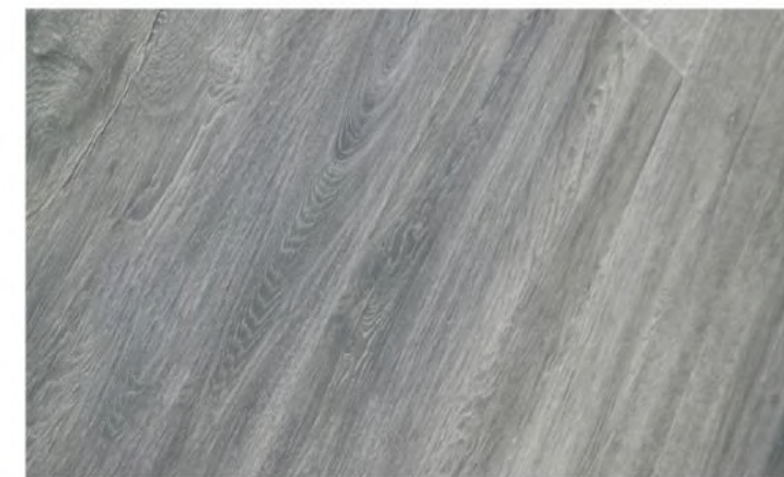

BT-SPC-5126



BT-SPC-6019



BT-SPC-6059



BT-SPC-6051



BT-SPC-6071



BT-SPC-6021



BT-SPC-6065



BT-SPC-6034



BT-SPC-6066

SPC地板

SPC FLOORING



Extreme strict
quality control



Considerable
sales service



intertek

SGS




STONE COLLECTION










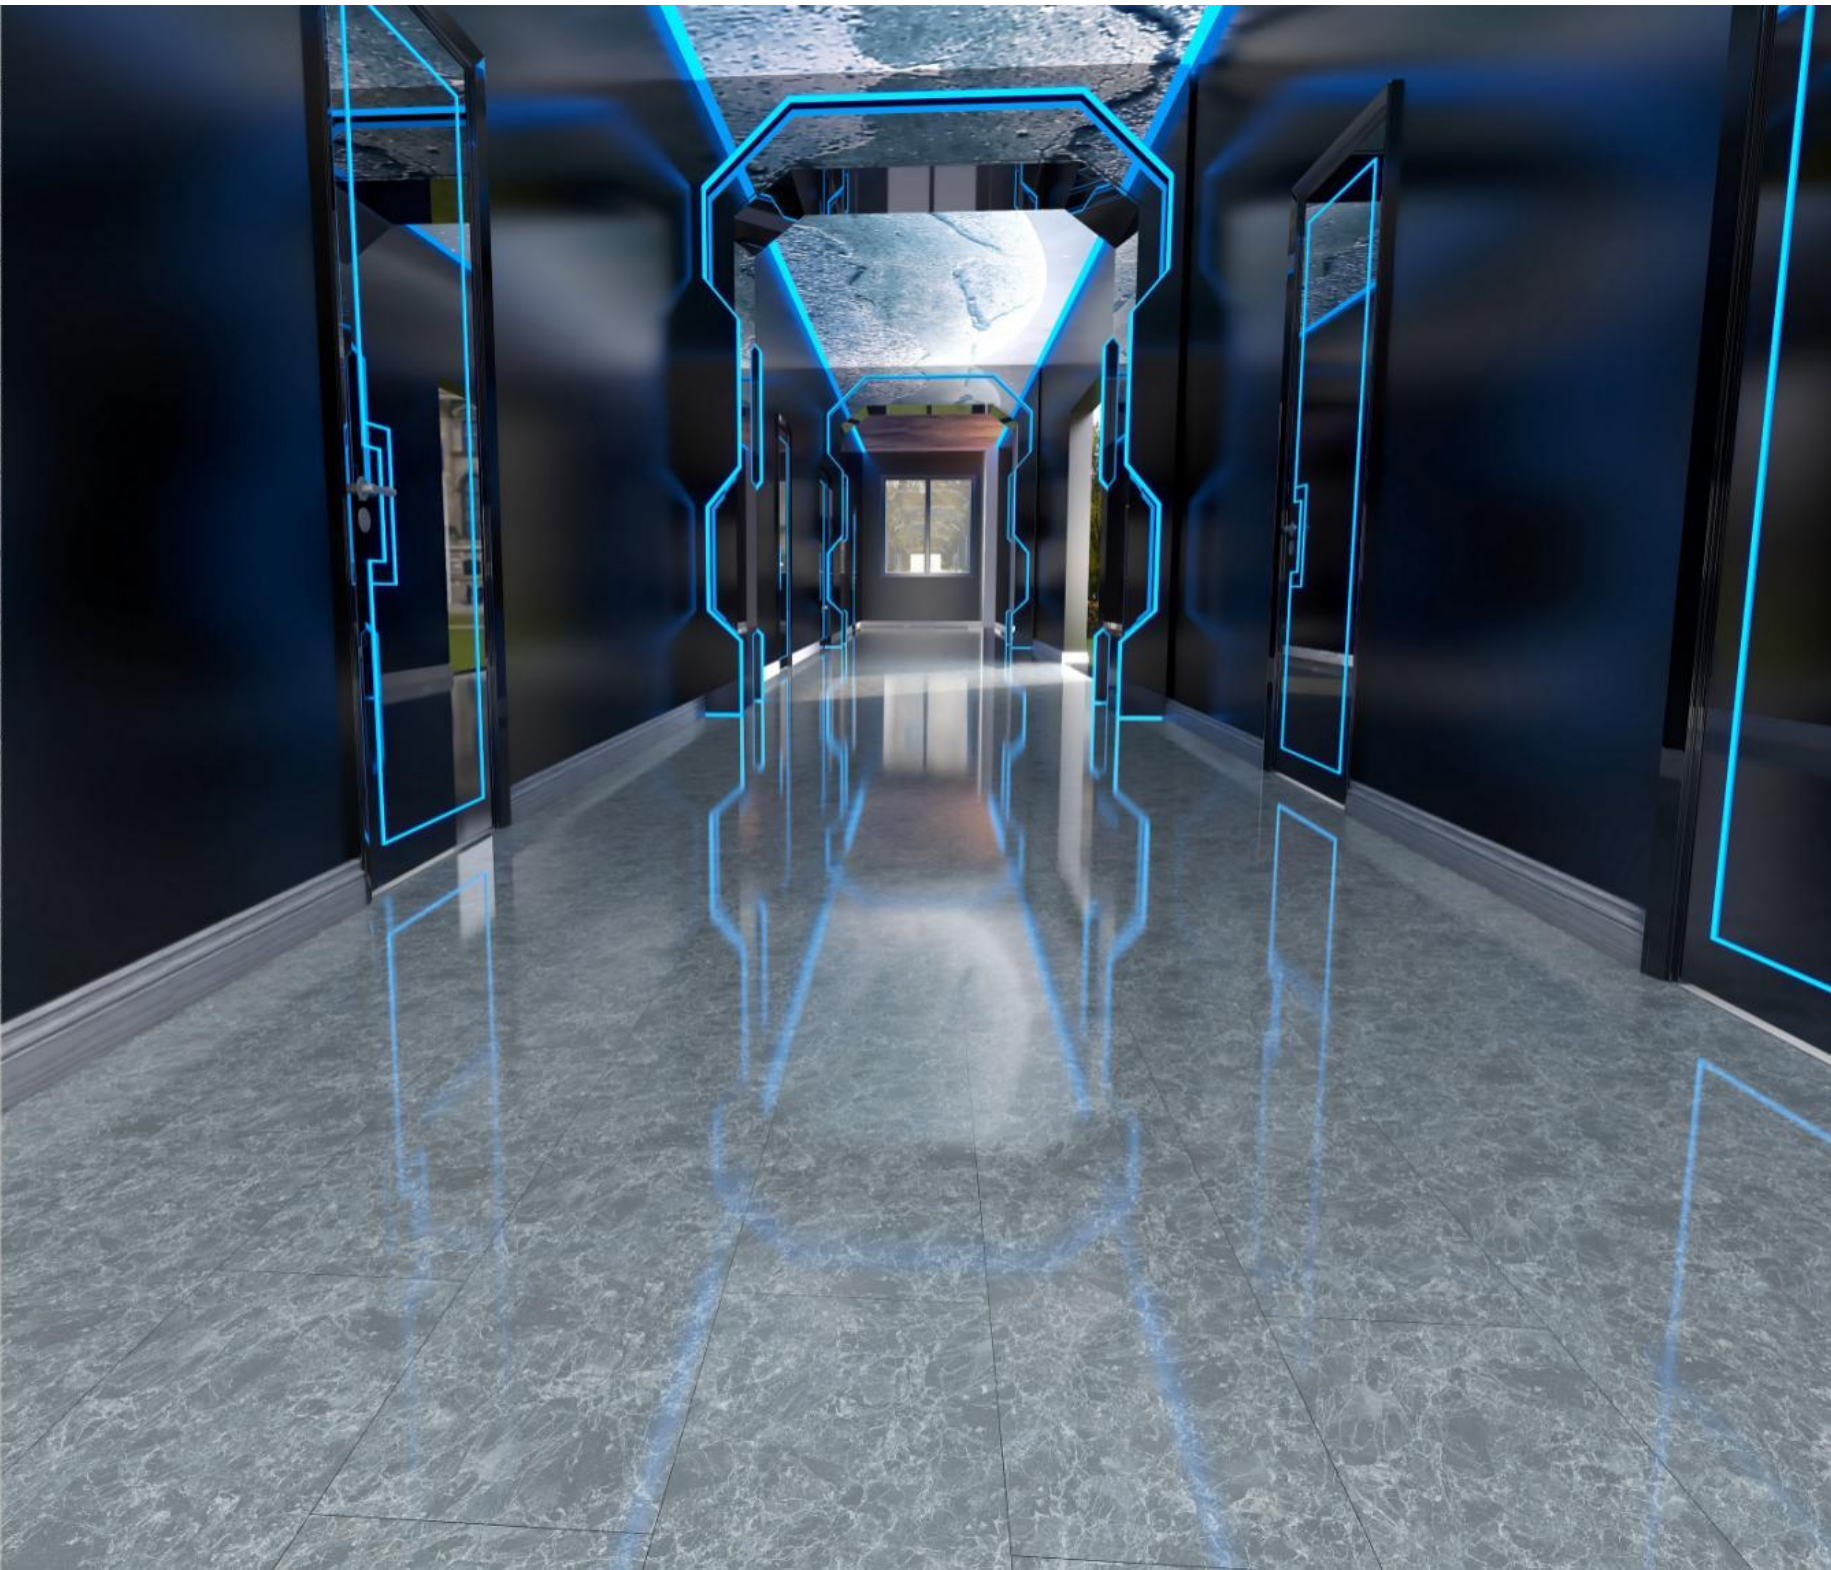






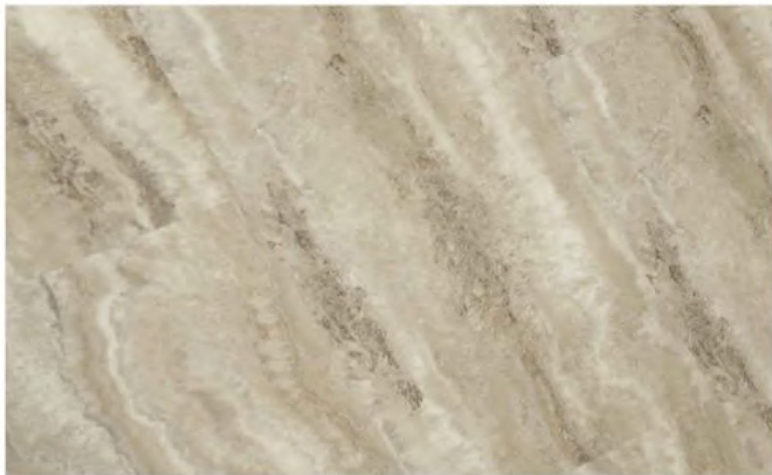


BT-SPC-3214

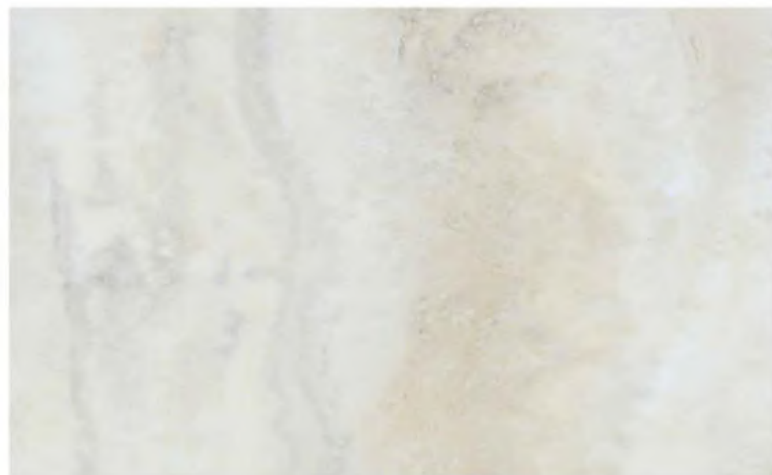

BT-SPC-3155



BT-SPC-3123

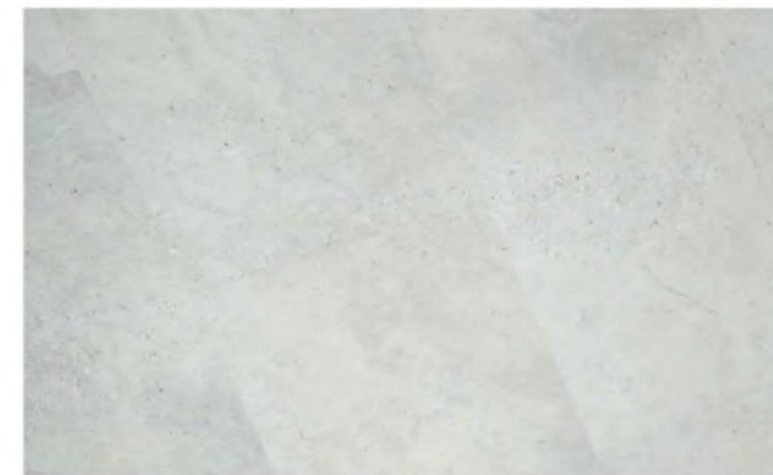

BT-SPC-3119



BT-SPC-3148



BT-SPC-3114



BT-SPC-3139




BT-SPC-3127



BT-SPC-3244



BT-SPC-3352

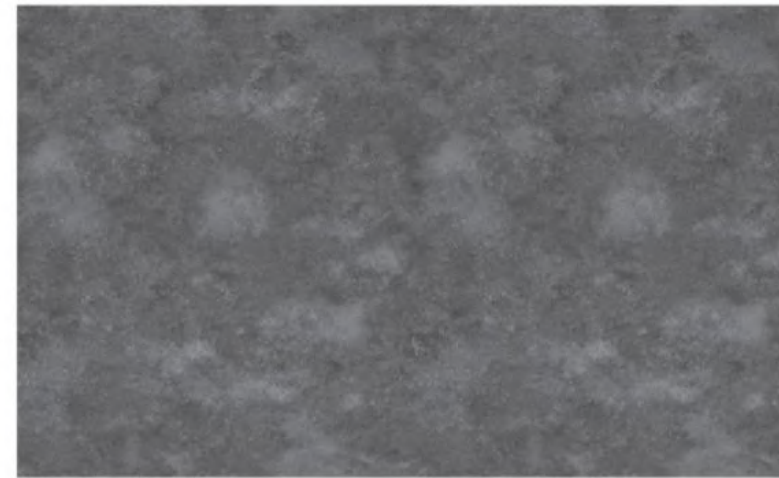


BT-SPC-3285



BT-SPC-3207



BT-SPC-3369

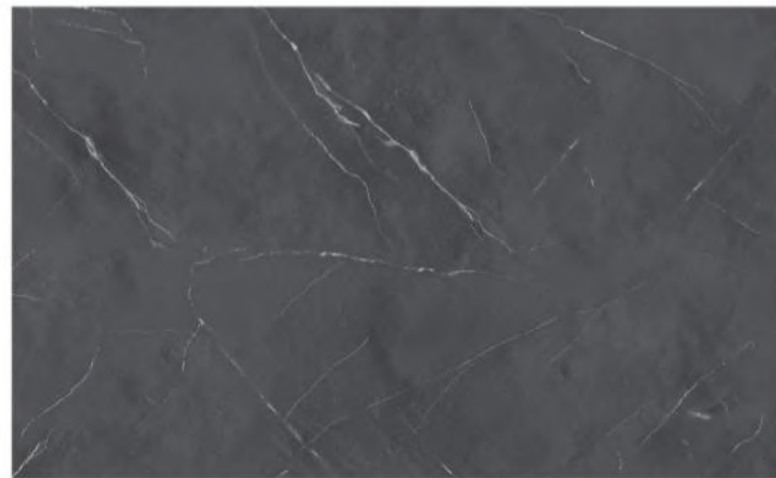

BT-SPC-3115



BT-SPC-3295



BT-SPC-3266




BT-SPC-3247




BT-SPC-3341



BT-SPC-3292

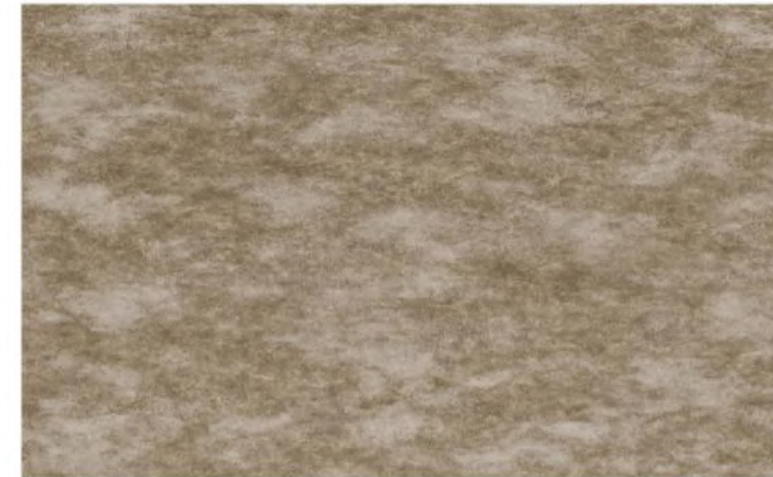


BT-SPC-3249

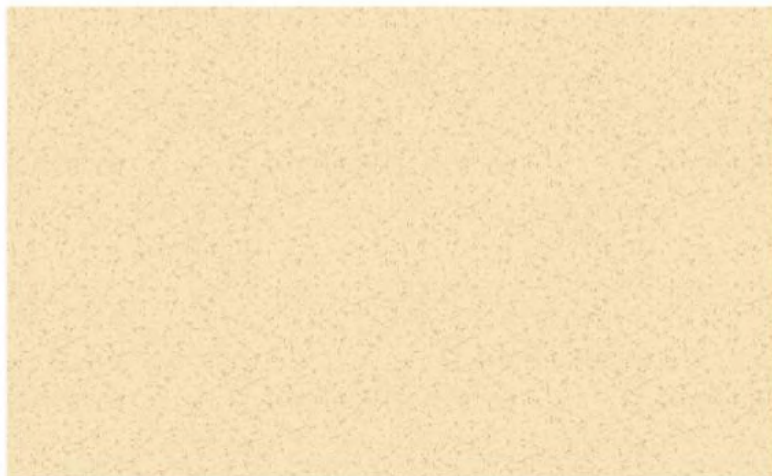

BT-SPC-3366



BT-SPC-3188

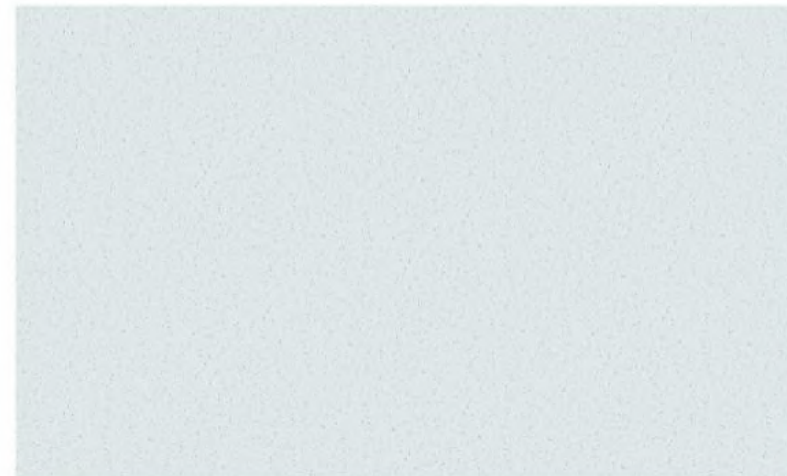

BT-SPC-3290



BT-SPC-3209

SPC地板

SPC FLOORING



Extreme strict
quality control



Considerable
sales service



intertek

SGS



CARPET COLLECTION















BT-SPC-8643



BT-SPC-8652



BT-SPC-8653



BT-SPC-8649




BT-SPC-8671



BT-SPC-8645



BT-SPC-8658

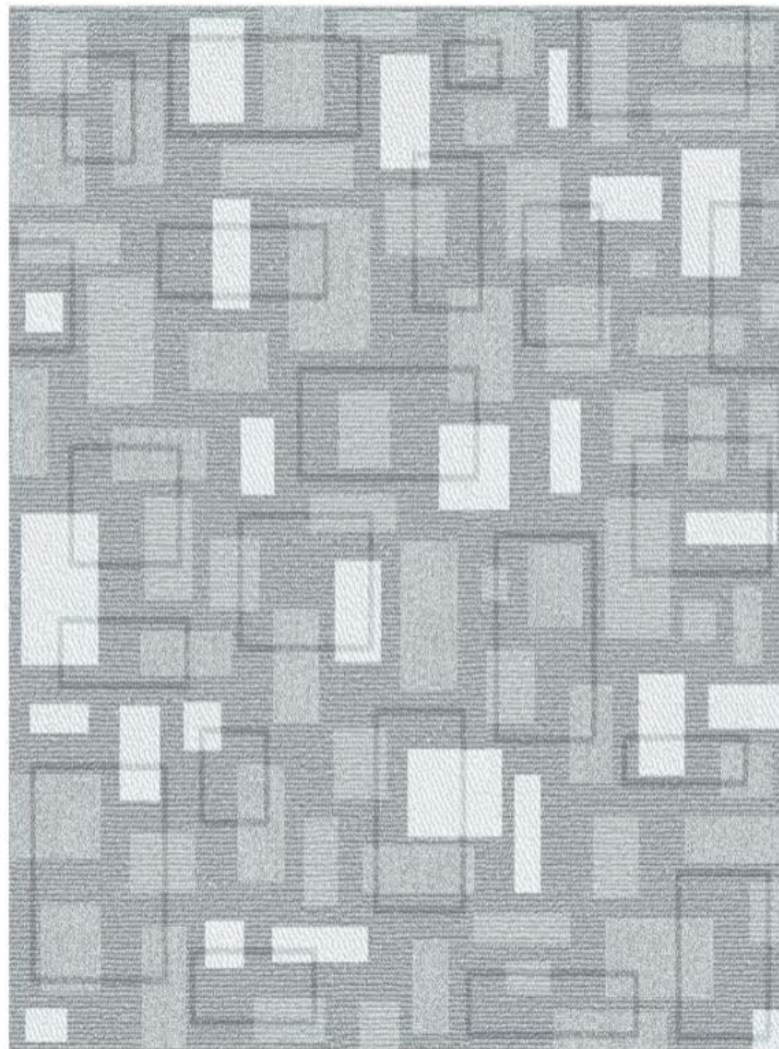


BT-SPC-8618



BT-SPC-8635



BT-SPC-8625

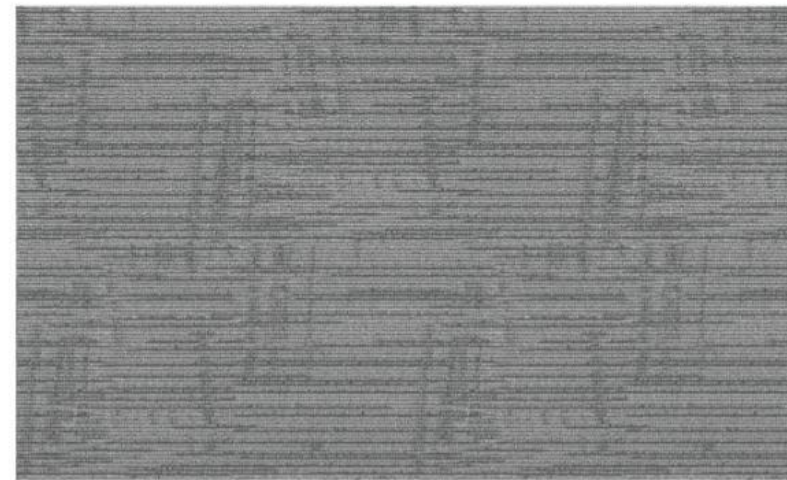


BT-SPC-8644



BT-SPC-8636



BT-SPC-8647

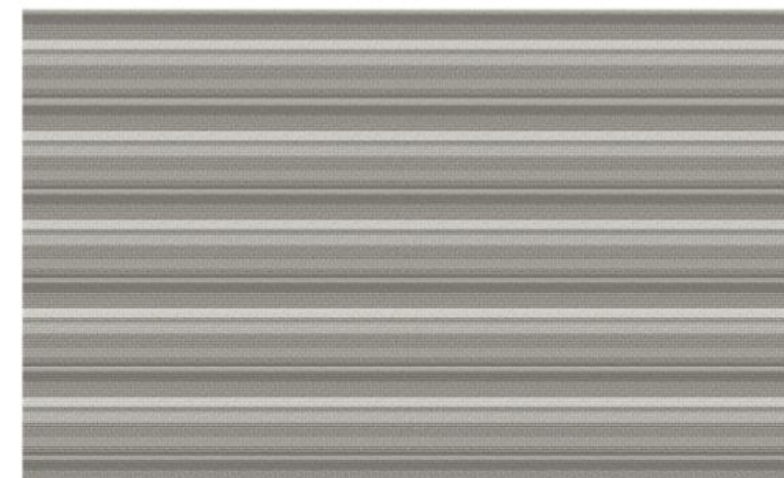

BT-SPC-8659

Suntek Material 品牌12大超级性能

Suntek Material brand 11 super performance

零甲醛

ZERO – FORMALDEHYDE

博拓地板完全由热熔共挤成型，产品不含任何粘合剂成分。经权威检测部门检测达到国标E1级标准(GB18580-2017)。不含任何有害物质，不会产生室内空气的二次污染，资源可循环利用，是绿色环保的新型地面装饰材料。

BoDo flooring completely by hot melt co-extrusion molding, the product does not contain any adhesive components. By the authority testing department detection of national standard E1 level standard (GB18580-2017). Does not contain any harmful substances, will not produce secondary pollution of indoor air, resources can be recycled, is a new type of green environmental protection ground decoration materials.

不含重金属及其它有害物质

FREE OF HEAVY METALS AND OTHER HARMFUL SUBSTANCES

博拓地板经深圳天祥质量技术服务有限公司上海奉贤分公司（Intertek）测试中心检测，博拓地板不含铅、镉、氯乙烯单体、邻苯类增塑剂等有害物质。

BoDo flooring has been tested by Intertek, and found that BoDo floor does not contain lead, cadmium, vinyl chloride monomer, benzene plasticizer and other harmful substances.

拒绝回收料

NO USED RAW MATERIAL

博拓地板一直致力保护环境，重视消费者及家人的健康。努力开发对健康没有威胁，对环境没有危害，技术含量高的产品。生产过程中每个环节都体现了我们对质量和环保的追求。

BoDo flooring has been committed to protecting the environment, pay attention to the health of consumers and their families. Efforts to develop no threat to health, no harm to the environment, high technical content of products. Our pursuit of quality and environmental protection is reflected in every link of the production process.

坚韧高弹

HIGH RESILIENTANCE

博拓地板质地坚韧，弹性较好，在重物的冲击下有良好的弹性恢复，同时具备很强的抗冲击性，不会造成地板的损坏。能够最大限度的降低地面对人体的损害，并可以分散对足部的冲击力，降低人员意外摔倒后受伤的几率。对老人和儿童的安全起到了最大的保护。

BoDo floor quality of a material is tough, flexibility is better, there is good elasticity to restore below the impact of the weight, have very strong resistance to impact at the same time, won't cause the damage of the floor. Can maximum reduce the damage to the human body, and to spread to the foot of blunt force. To force take strike force, reduce the risk of accidentally fell down injured. The safety of the elderly and children has played a maximum protection.

防水防火 坚固稳定

WATERPROOF & FIRE RETARDANT

博拓地板全板防水、防潮，从根本上解决了木质产品在潮湿和多水环境中吸水受潮、容易腐烂、膨胀、变形的问题。可以应用于传统木地板不能应用的环境，如厨房、浴室中。其产品基材的稳定性决定了其不会开裂、鼓胀、翘曲，从极寒(-20℃)到极热(60℃)的室内空间均可无忧使用。博拓地板达到国家标准的B1防火级别，远高于木质地板，其本身不会燃烧且能够阻燃，即使在500℃的高温下，也能保证安全。

BoDo floor board waterproof, moisture-proof. It fundamentally solves the problems of water absorption and dampness of wood products in humid and water-rich environment, which are easy to rot, expand and deform. It can be used in environments where traditional wood flooring cannot be used, such as kitchen and bathroom., the stability of the product substrate determines that it will not crack, bulge, warp, from the very cold (-20℃) to the very hot (60℃). Indoor space can be used without worry. BoDo floor to the national standard of B1 fire level, far higher than the wooden floor. It itself does not burn and is flame retardant. Even in the high temperature of 500℃, also can ensure safety.

高强耐磨

WEAR RESISTANCE

博拓地板表面有一层特殊经高科技加工的A1203耐磨层，其耐磨转数可达16000转，远强于传统强化地板的6000转，具备超强的耐磨损和耐划痕性能。BoDo floor surface has a special layer of high-tech processing A1203 wear-resistant layer, its wear-resistant revolution up to 16000 RPM, far stronger than the traditional laminate floor 6000 RPM, with super wear resistance and scratch resistance.

舒适防滑

SLIP RESISTANCE

博拓地板表层的耐磨层具有特殊的防滑性能，而且与普通的地面材料相比较，博拓地板在沾水的情况下脚感更涩，更不容易令人滑倒。

BoDo floor surface wear-resisting layer has special anti-skid performance, and compared with the ordinary ground material, BoDo floor in the water in the case of foot feeling more acerbity, more not easy to slip.

抗菌杀菌

BACTERIA RETARDANT

博拓地板表面经过特殊的银离子抗菌处理，并添加了抗菌剂。对绝大多数细菌都有杀灭和抑制繁殖的效果。确保您家庭的健康卫生。

BoDo floor surface through a special anti-bacterial silver ion treatment, and added antimicrobial agents. It has the effect of killing and inhibiting reproduction to the vast majority of bacteria. Ensure the health and hygiene of your family.

隔音吸音

SOUND ABSORPTION

博拓地板有着普通地面材料无可比拟的吸音效果，吸音性能高达20分贝。为您提供更为舒适、安静的人性化生活环境。

BoDo floor has an incomparable sound-absorbing effect of ordinary ground materials, sound-absorbing performance up to 20 decibels. To provide you with a more comfortable, quiet humanized living environment.

防霉防虫

MOLD RESISTANCE

博拓地板的基材性质决定了其不易滋生霉菌，同时也杜绝了虫害，不繁殖细菌，不易被虫蛀，不长真菌，使用寿命增长。

The property of the base material of the BoDo floor decided its not easy to breed mold, also put an end to insect pests, do not breed bacteria, not easy to be moth eaten, not long fungus, service life growth.

地暖适用

UNSERFLOOR HEATING ADAPT

博拓地板导热性能良好，散热均匀，热膨胀系数小。使用过程中，脚感温暖舒适，适合躺卧，是地暖系统的首要之选。

BoDo floor has good thermal conductivity, uniform heat dissipation and small thermal expansion coefficient. In the process of use, feet feel warm and comfortable, suitable for lying down, is the first choice of floor heating system.


耐酸耐腐蚀

CORROSION RETARDANT

博拓地板具备超强的耐酸碱耐腐蚀性能，可以经受恶劣环境的考验，适合在医院、实验室、研究所等公共建筑使用。

BoDo flooring has super acid, alkali and corrosion resistance, can withstand the test of harsh environment, suitable for use in hospitals, laboratories, research institutes and other public buildings.


SPC FLOOR

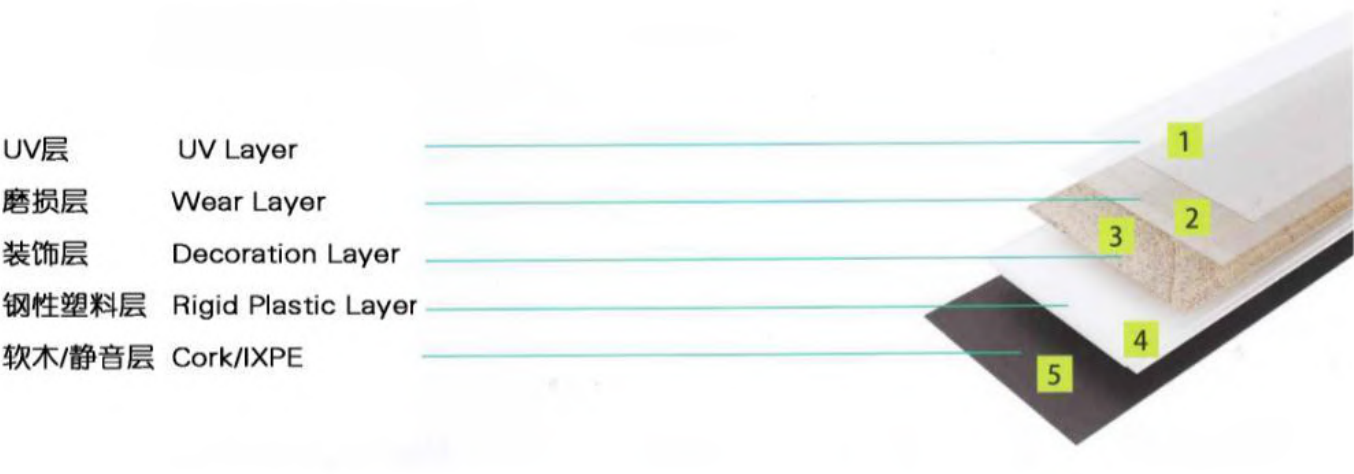

- UV层 UV Layer
- 磨损层 Wear Layer
- 装饰层 Decoration Layer
- 钢性塑料层 Rigid Plastic Layer
- 软木/静音层 Cork/IXPE

技术数据（TECHNICAL DATA）		
连接（CONNECT）	博拓 SPC 地板（BODO SPC Floor）	
标准尺寸(Standard Size)	1213mm*177mm	935mm*144mm available to be customized
厚度（Thickness）	4.0mm/4.5mm/5.0mm/5.5mm	
磨损层（Wear Layer）	0.3mm/0.5mm	
静音层（IXPE Pac）	1.0mm/1.5mm/2.0mm	
密度（Density）	2t/m³	
质量保证（Warranty）	35years warranty for private Residential buildings	35years warranty for commercial buildings

ABA FLOOR

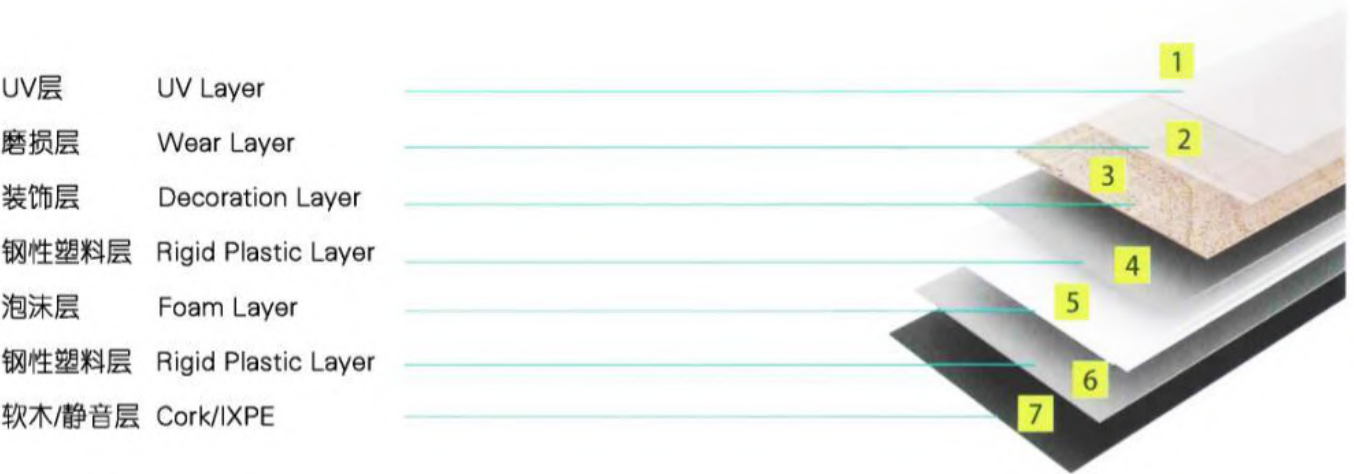

- UV层 UV Layer
- 磨损层 Wear Layer
- 装饰层 Decoration Layer
- 钢性塑料层 Rigid Plastic Layer
- 泡沫层 Foam Layer
- 钢性塑料层 Rigid Plastic Layer
- 软木/静音层 Cork/IXPE

技术数据（TECHNICAL DATA）		
连接（CONNECT）	博拓 ABA 地板（BODO ABA Floor）	
标准尺寸(Standard Size)	1213mm*177mm	935mm*144mm available to be customized
厚度（Thickness）	6.0mm/7.0mm/8.0mm	
磨损层（Wear Layer）	0.3mm/0.5mm	
静音层（IXPE Pac）	1.0mm/1.5mm/2.0mm	
密度（Density）	1.3-1.4t/m³	
质量保证（Warranty）	35years warranty for private Residential buildings	35years warranty for commercial buildings

性能参数			结构示意图	
	民用等级 EN ISO 10874	Class23重度民用	1	UV层
	商用等级 EN ISO 10874	Class33中度商用	2	耐磨层
	层间剥离拉力 EN431 GB/T34440	通过	3	装饰层
	层间剪切力 EN432	通过	4	硬质高分子
	加热尺寸变化率 EN434 GB/T34440	0.20%	5	软木/吸音层（可选）
	翘曲 EN434	0.14mm		
	弹性弯曲 EN435	无损伤		
	耐磨性 EN660	2.0mm ³		
	色牢度 EN20105 GB/T34440	通过		
	防火性 ASTME84 GB8624	B ₁ (B-SL)		
	防滑性 DIN51130	R ₉		
	轮脚适用度 EN425	适用		
	抗化学品腐蚀性 EN423 ASTM F925	0级		
	带热系数（25℃） GB/T10295	0.142W(M.K)		



INGER CERTIFICATION ASSESSMENT SERVICES



MANAGEMENT SYSTEM CERTIFICATE

Certificate No.: 117 18 QU 0158-03 R1M
This is to certify the quality management systems of

Bodo Plastics Co., Ltd.

Unified Social Credit Code **91370300797302929Q**

Registered Address **(North Taixue Road, West Wenhe Road) Economic Development Zone, Yiyuan County, Zibo, Shandong**

Auditing Address **(North of Taixue Road, West of Wenhe Road), Economic Development Zone, Yiyuan County, Zibo, Shandong (Factory, Office)**
(East of Zhenxing Road, West of Qingdao Road), Economic Development Zone, Yiyuan County, Zibo, Shandong (Factory)

has been assessed and registered as meeting the requirements of
GB/T19001-2016/ISO9001:2015

Scope of approval
Production, Processing and Sales of PVC Foam Board and PVC Mouldings

Signed by: 



First Certification: 27 Apr. 2015
Recertification Date: 27 Mar. 2018
Expiry Date: 26 Apr. 2021
Revision Date: 29 Jul. 2020





First Surveillance Audit Second Surveillance Audit Third Surveillance Audit

Shanghai Ingeer Certification Assessment Co.,Ltd.

Certification and Accreditation Administration of PRC:CNCA-R-2003-117

Tel: 400-182-9001/486 21-51114700

Web: www.icas.org.cn

Add: Room 801,HuaDing Mansion, 2368# West Zhongshan Rd., Xuhui District, Shanghai, China, 200235

Focus on Icas WeChat platform

The ownership of the certificate belongs to Shanghai Ingeer Certification Assessment Co., Ltd. The information & validation of this certificate can be checked on the CNCA website: WWW.CNCA.GOV.CN and ICAS website, or by calling ICAS's clients services Dept. The certificate is only valid when used together with related permits when appropriate. If the organization can't effectively maintain the above management system, ICAS has the right to withdraw the qualification certificate.

INGER CERTIFICATION ASSESSMENT SERVICES



MANAGEMENT SYSTEM CERTIFICATE

Certificate No.: 117 18 EU 0058-03 R1M
This is to certify the environmental management systems of

Bodo Plastics Co., Ltd.

Unified Social Credit Code **91370300797302929Q**

Registered Address **(North Taixue Road, West Wenhe Road) Economic Development Zone, Yiyuan County, Zibo, Shandong**

Auditing Address **(North of Taixue Road, West of Wenhe Road), Economic Development Zone, Yiyuan County, Zibo, Shandong (Factory, Office)**
(East of Zhenxing Road, West of Qingdao Road), Economic Development Zone, Yiyuan County, Zibo, Shandong (Factory)

has been assessed and registered as meeting the requirements of
GB/T24001-2016/ISO14001:2015

Scope of approval
Production, Processing and Sales of PVC Foam Board and PVC Mouldings

Signed by: 



First Certification: 27 Apr. 2015
Recertification Date: 27 Mar. 2018
Expiry Date: 26 Apr. 2021
Revision Date: 29 Jul. 2020





First Surveillance Audit Second Surveillance Audit Third Surveillance Audit

Shanghai Ingeer Certification Assessment Co.,Ltd.

Certification and Accreditation Administration of PRC:CNCA-R-2003-117

Tel: 400-182-9001/486 21-51114700

Web: www.icas.org.cn

Add: Room 801,HuaDing Mansion, 2368# West Zhongshan Rd., Xuhui District, Shanghai, China, 200235

Focus on Icas WeChat platform

The ownership of the certificate belongs to Shanghai Ingeer Certification Assessment Co., Ltd. The information & validation of this certificate can be checked on the CNCA website: WWW.CNCA.GOV.CN and ICAS website, or by calling ICAS's clients services Dept. The certificate is only valid when used together with related permits when appropriate. If the organization can't effectively maintain the above management system, ICAS has the right to withdraw the qualification certificate.